

MODEL: 51001CON

ASSEMBLY INSTRUCTIONS

READ AND SAVE THESE INSTRUCTIONS

READ INSTRUCTIONS ALL THE WAY THROUGH PRIOR TO ASSEMBLY.

THIS FOUNTAIN SHOULD TAKE APPROXIMATELY 15 MINUTES TO ASSEMBLE.


MAKE SURE ALL PARTS ARE FIRMLY TIGHTENED.

UNPACK THE FOUNTAIN


YOU SHOULD HAVE RECEIVED THE FOLLOWING PARTS: FOUNTAIN BODY, (2) PEGS, BASE, SPOT LIGHT, PUMP, TRANSFORMER, FRONT COVER AND BACK COVER.

FOUNTAIN ASSEMBLY


1. INSERT (2) PEGS INTO THE HOLES IN TOP OF BASE.

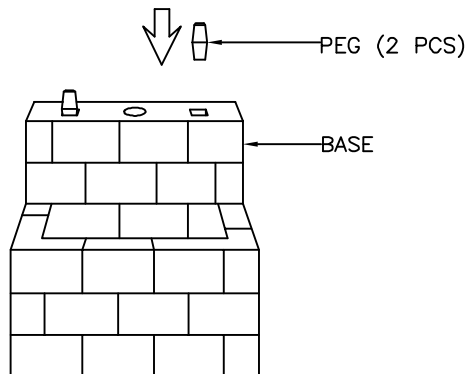

2. FEED RUBBER HOSE THROUGH HOLE IN BASE, THEN PLACE FOUNTAIN BODY ON TOP OF THE BASE.

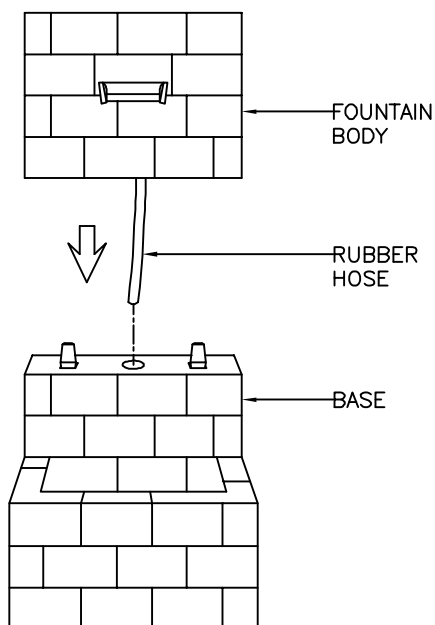


3. PLACE PUMP INTO RESERVOIR, FEED PUMP POWER CORD THROUGH HOLE IN RESERVOIR AND TOWARDS THE ENTRY ON BACK OF THE BASE, THEN COVER THE ENTRY WITH BACK COVER.

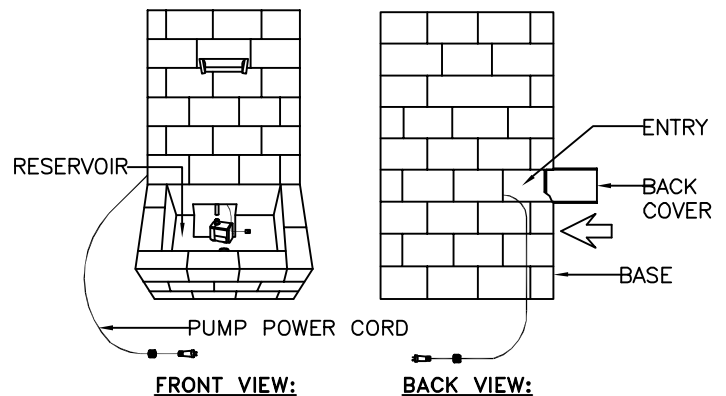


4. JOIN THE LIGHT CONNECTORS AND SCREW CAPS TO CONNECTORS TIGHTLY TOGETHER.

5. ATTACH PUMP TO RUBBER HOSE, THEN PLACE SPOT LIGHT INTO SPOT LIGHT HOLDER.

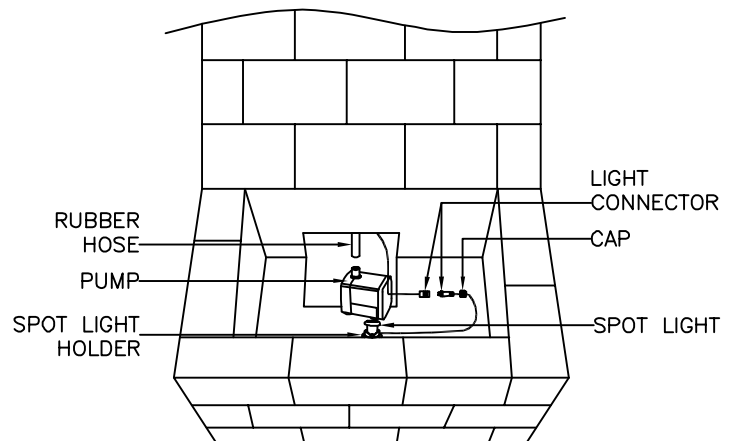

6. PLACE FRONT COVER INTO RESERVOIR TO COVER THE ENTRY.

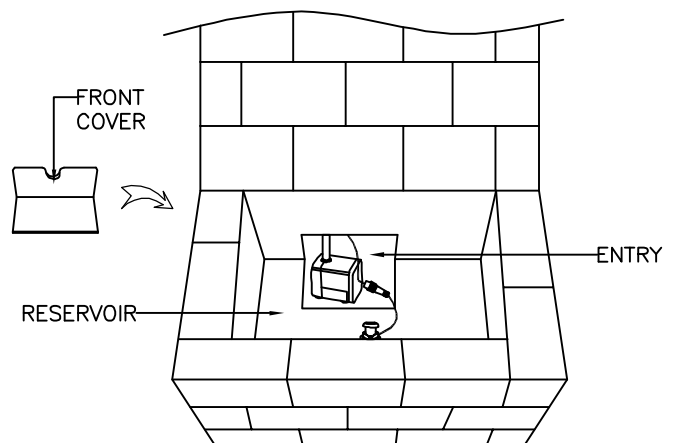


MODEL: 51001CON

ASSEMBLY INSTRUCTIONS

READ AND SAVE THESE INSTRUCTIONS


7. FILL RESERVOIR WITH 7 GALLONS OF WATER TO COMPLETELY SUBMERSE THE PUMP.

NOTE: DISTILLED WATER IS RECOMMENDED TO REDUCE MINERAL DEPOSITS AND BACTERIA BUILD-UP.

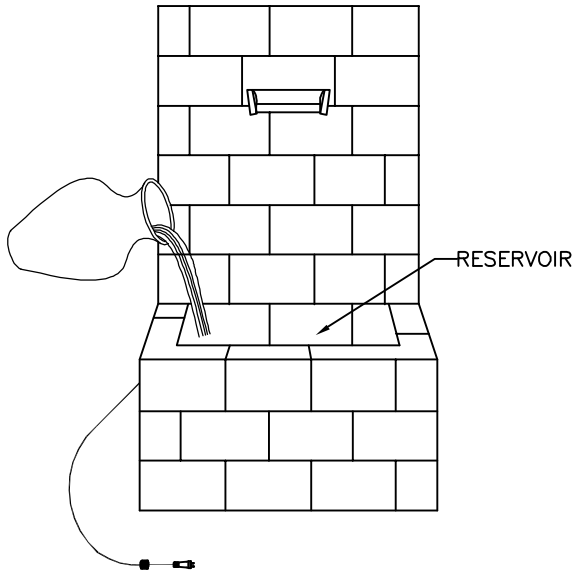

8. JOIN THE TRANSFORMER CONNECTORS AND SCREW CAP TO CONNECTORS TIGHTLY TOGETHER.

9. PLUG POWER CORD INTO OUTLET, YOUR NEW FOUNTAIN IS READY FOR USE.

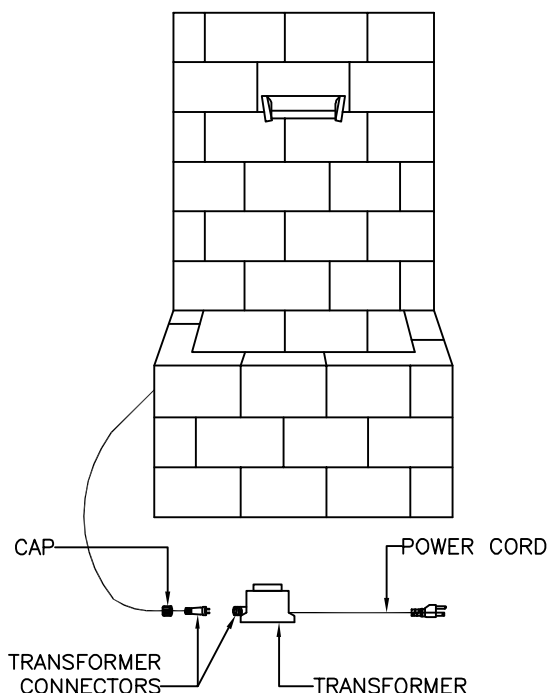

TROUBLE SHOOTING:

1. IF YOUR FOUNTAIN DOES NOT WORK, CHECK PLUG AT THE SOCKET. MAKE SURE THE PLUG IS FULLY AND PROPERLY INSERTED INTO THE WALL OUTLET.

2. NEXT CHECK TO MAKE SURE THE OUTLET IS POWERED.

3. IF THE FOUNTAIN STILL DOES NOT WORK, PLEASE CONTACT YOUR DISTRIBUTOR OR PLACE OF PURCHASE.

SPLASHING DISCLAIMER:

SPLASHING MAY OCCUR WHEN FOUNTAIN IS INITIALLY TURNED ON. PROTECT SURROUNDING SURFACES AS NEEDED.

IMPORTANT PUMP INFORMATION:

PUMP MUST BE FULLY SUBMERSED IN WATER WHILE OPERATING.

WATER:

TO REDUCE MINERAL DEPOSITS AND BACTERIA BUILD UP THE USE OF DISTILLED WATER IS RECOMMENDED.

WARNING:

* ONCE A WEEK INSPECT FOUNTAIN, FLOOR AND ADJACENT WALL FOR MOISTURE BUILD-UP AND CLEAN AS NECESSARY. THIS IS ESPECIALLY IMPORTANT FOR HUMID ENVIRONMENTS.

** THIS FOUNTAIN IS RATED FOR OUTDOOR USE.

*** THIS UNIT MUST BE CONNECTED TO A SUPPLY CIRCUIT THAT IS PROTECTED BY A GROUND FAULT CIRCUIT INTERRUPTER (GFCI). THE GFCI SHOULD BE TESTED ON A ROUTINE BASIS. TO TEST THE GFCI, PUSH THE TEST BUTTON. THE GFCI SHOULD INTERRUPT POWER. PUSH THE RESET BUTTON. POWER SHOULD BE RESTORED. IF THE GFCI FAILS TO OPERATE IN THIS MANNER, THE GFCI IS DEFECTIVE.